

# iSignager-500A/ 500AWL




## Software Features

- ◆ Multi zone layout supports full spectrum of media formats
- ◆ Flexible schedule management showing customized contents in different time period
- ◆ Network management function to support remote content update
- ◆ The drag and drop interface enables you to assign zones within one display layout in seconds

## Hardware Specifications

◆ Video Input	Composite Video with RCA connector
◆ Audio Input	Stereo audio with RCA connector
◆ Video Output	DVI / Analog VGA (RGBHV or YPbPr) S-Video / Composite Video
◆ Audio Output	Stereo audio with RCA connector
◆ Network	10/100Mbps
◆ USB	2 x USB 2.0
◆ Serial Port	2 x RS-232 (1 on front panel, 1 on I/O panel)
◆ Storage	1 x CompactFlash socket for type II 1 x internal 2.5" IDE HDD
◆ Power Input	12VDC
◆ Power Consumption	8W
◆ Chassis Construction	ABS + PC Plastic (front panel) Heavy duty steel
◆ Operating Temperature	0°C ~50°C
◆ Operating Shock	3G acceleration peak to peak (11ms)
◆ Operating Vibration	MIL-STD-810F 514.5C-1
◆ Weight (Net/ Gross)	1.2Kg / 2.4Kg
◆ Dimensions (DxWxH)	187.2 mm x 133.7 mm x 46 mm


## Dimensions (unit : mm)

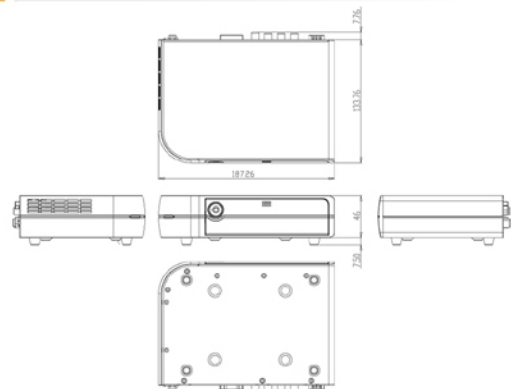

## Packing List

- 1 x QIG
- 1 x power adaptor
- 1 x power cord
- 2 x wall mount bracket
- 1 x iSignager AdExpress & AdDesign software CD
- 1 x AV cable
- 1 x IDE cable
- 2 x key
- 1 x screw set
- 1 x 1GB CompactFlash card

## Backpanel View

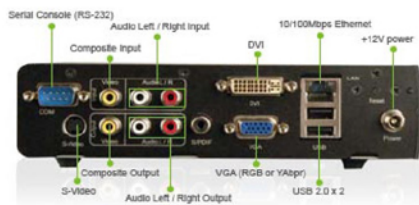

Network Digital Signage Player



digital signage  
advertising